T E K


S H E

TYPICAL X-LED SERIES



PH 810-852-4242 info@littlite.com littlite.com littlitedirect.com

4 Pin Configurations

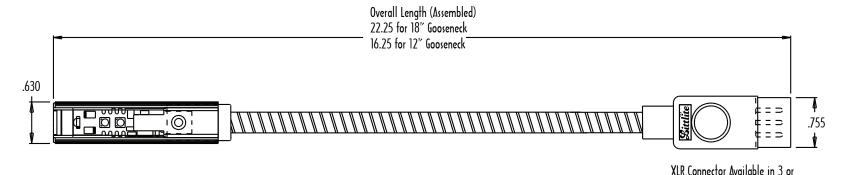

LED Specifications:

12 Volts AC/DC

Draw Approximately .135mA

Nylon LED Hood

Gooseneck Diameter .312

Standard LED 3-Pin

Pin 1 Jumpered to Ground Lug

in 2 Black Negative

Pin 3 White (Positive)-White w/Red LED's


Standard LFD 4-Pin

Pin 1 Not Connected

Pin 2 Red (Positive) Red LED's Only

Pin 3 White (Positive)-White w/Red LED's

Pin 4 Black (Negative)





© Not to be reprinted without the permission of Littlite LLC. All designs, construction and other disclosures set forth herein are the property of Littlite LLC, and such information is provided to you in confidence. In accepting this information you agree not to reproduce it, to manufacture it, disclose it, or have it manufactured in whole or in part without written permission of Littlite LLC